



## Handsender Jane V

Frequenz: 433,92 MHz - 868,3 MHz  
Codierung: Fest-Code  
Kanäle: 4  
Energieversorgung: Lithium Batterie CR2032  
Arbeitstemperatur: -40°C - +50°C



- Geben Sie Handsender niemals in Kinderhände
- Die Handsender dürfen ausschließlich von Personen bedient werden die mit der Anlage vertraut sind und in deren Funktion eingewiesen sind
- Das Anlernen der Handsender muss stets in der Nähe des Torantriebs vorgenommen werden. Verwenden Sie hierzu ausschließlich Originalteile
- Schützen Sie den Handsender vor Witterung wie Regen, Schnee, Sonneneinstrahlung oder auch Staub, ansonsten kann die Funktion des Senders beeinträchtigt werden
- Zum Wechseln der Batterie lösen Sie bitte die Schraube auf der Rückseite des Handsenders
- Der Originalhandsender und der Jane V müssen im gleichen Frequenzbereich liegen.


### Programmierung:

**Hinweis:** Bitte führen Sie die Schritte sauber und aufmerksam durch

- F: Drücken und Halten Sie die Taste 1 und 3 (siehe Tastenbelegung in oben gezeigter Abb.) bis die grüne LED des Handsenders anfängt zu blinken.
- G: Drücken und Halten Sie nun die Handsendertaste gedrückt, die Sie einlernen wollen und halten Sie Ihren Originalhandsender und den Jane V-Handsender wie in einer der unten aufgelisteten Abbildungen.
- H: Die LED wird nun viel schneller blinken, da der Jane V-Handsender die passende Codierung sucht und empfängt.
- I: Wenn der Jane V-Handsender nun Ihren Originalhandsender erfolgreich angenommen hat, wird die LED für einen Moment dauerhaft blinken und die LED erlischt eine kurze Zeit später. Der Handsender ist nun eingelernt.
- É: Wenn Sie eine neue Taste einlernen wollen, wiederholen Sie die nochmal alle oben aufgeführten Schritte in der Reihenfolge.

Sollte der Programmiervorgang nicht richtig funktioniert haben, leiten Sie bitte folgende Schritte ein:

- Wiederholen Sie den Vorgang und versuchen Sie hierbei die beiden Handsender in einer anderen Position wie unten aufgelistet aneinander zu halten.
- Wenn der Einlernvorgang bis zum Ende richtig funktioniert hat, aber die Codierung nicht übertragen wurde, leiten Sie eine erneute Duplizierung ein, wo Sie zwischen den Handsendern 1/2 cm Platz zu lassen.
- Wechseln Sie die Batterie Ihres Originalhandsenders. Eine leere Batterie kann die Codierung nicht vollkommen übertragen.

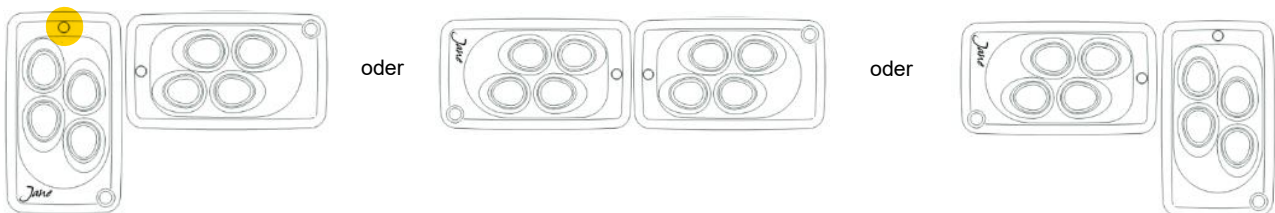

Warranty: 24 months – Manufacturing and technology 100% made in Italy – Patented product

#### Vereinfachte EU-Konformitätserklärung (CE)

The undersigned Luigino Pellattiero, legal representative of ITALFILE srl, declares that the remote control JVxxx-2/JVxxx-4, manufactured in 2011 was assembled in compliance with the following standards:  
Directive 2004/108/CE – know as the Electromagnetic Compatibility Directive  
Directive 2002/95/CE – known as the RoHS Directive – And therefore complies with current standards.  
Luigino Pellattiero – Vincenza, 1.10.2011



Schartec  
eine Marke der bau-shop-24 GmbH  
Fritz-Müller-Strasse 115  
73730 Esslingen



## Remote Control Jane V

Frequency: 433,92 MHz - 868,3 MHz

Encryption: FIXED-Code

Channels: 4

Energy supply: Lithium battery 3v (CR2032)

Working temperature: -40°C - +50°C

- Keep remotes out of reach of children.
- Remote controls may only be operated by persons who are familiar with the system and have been instructed in their function.
- Coding in remote controls must always be carried out within the vicinity of the door operator. Use only original parts.
- Protect remotes from rain, snow, sunlight or dust, otherwise the function of the transmitter may be impaired
- To replace the battery, unscrew the screws on the back of the remote.
- The original remote control and the pairing Jane V remote must have the exact same frequency range.

### **Programming:**

1. Press and hold a button on the Jane remote control that you want to program. (do not release this button! If you release the keys after each step you will have to repeat the procedure!)
2. As soon as the LED on the Jane remote starts to flash, hold the Jane remote and your original remote as shown on the first picture.



3. Press and hold the programmed button on your original remote control.
4. When the Jane remote has received the code, the LED will remain lit for 3 seconds and then go out.
5. You may now release both buttons and operate your opener/operator.

***If the transfer of the code didn't work, try holding the Jane remote and your original remote in one of the other positions as depicted above (try also holding the remotes back to back).***

#### **Programming video:**

can be found at [www.schartec.de/en/](http://www.schartec.de/en/)

#### **Simplified EU Declaration of Conformity (CE)**

Warranty: 24 months – Manufacturing and technology 100% made in Italy – Patented product  
Compliance statement

The undersigned Luigino Pellattiero, legal representative of ITALFILE srl, declares that the remote control JQxxx-2/JQxxx-4, manufactured in 2011 was assembled in compliance with the following standards:

Directive 2004/10/CE – known as the Electromagnetic Compatibility Directive

Directive 2002/95/CE – known as the RoHS Directive – And therefore complies with current standards.

Luigino Pellattiero – Vincenza, 1.10.2011



Schartec  
a trademark of bau-shop-24 GmbH  
Fritz-Müller-Strasse 115  
73730 Esslingen, Germany